



ML500 LED LANTERN

QUICK START GUIDE

EARLY WARNING IS YOUR BEST PROTECTION®

1. Hold the lantern with the bail handle facing downward.
2. Hold the lantern with one hand, grab the base of the lantern with the other hand, and twist the base of the lantern counterclockwise until it is removed from the lantern (Fig.1).
3. Insert three new “D” cell batteries* into the battery slots (Fig.2).
 - a. NOTE: Be sure to follow the battery orientation images on the base of the lantern to insert the batteries correctly.
4. With the batteries now installed, position the bottom cover such that the diamond-shape positioning post corresponds with the positioning slot in the base of the lantern (Fig.3).
5. Turn the bottom cover clockwise until it becomes tight.
 - a. NOTE: be careful not to overtighten the bottom cover.

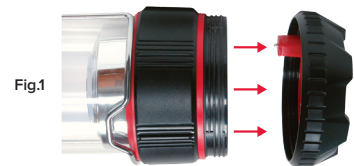

 **WARNING:** Do not mix old with new batteries. *Batteries are not included.
Do not mix alkaline, standard (carbon-zinc), or rechargeable (NiCad or NiMH) batteries.