

Table of Contents

Main features	2
Charging batteries	2
Unit and mounting system description	2
Switching your Midland BT Remote on and off	3
Operative mode	3
Pairing the BT Remote	3
Reset pairing	3
FCC compliance information	4
Other products	5
Midland BT product order form	6

MIDLAND BT Remote

Advanced Remote Control System

Thank you for purchasing the Midland BT Remote advanced wireless remote control system for your Midland intercom.

The Midland BT Remote can be mounted to the handlebar of your motorcycle and control all the functions of your BT intercom devices.

Main features

- › Adjustable mounting system
- › 3 main function buttons and 2 volume buttons
- › Mini USB plug for charging
- › Waterproof

Charging batteries

Ensure the BT Remote is fully charged before use. Charge the unit by inserting the mini USB cable in the charging plug (lift the rubber cover to insert the plug). You can use any USB wall charger or use the USB port of your PC. The red LED light will turn on during charging. When the unit is fully charged, the red LED light will turn off.

Please note: Every time the mini USB charging plug is inserted (or detached), the device is automatically turned off. To use the BT Remote while it is charging, you should turn the device on when the plug is already inserted.


Low battery indication

If the red LED is flashing and the unit is not plugged into a charger, it means the battery is low. Please recharge the unit as soon as possible.

Unit and mounting system description


BT Remote description

The BT Remote has five buttons on the front; the three main buttons are multi function buttons: the “Forward” button (on the top), the “Middle” button and the “Back” button (on the bottom). The two small rounded buttons on the front are the “Volume +” and “Volume -”.

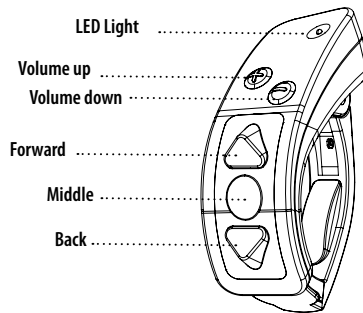

Mounting system description

The Midland BT Remote is easy to mount, just open and place it on the handle of your motorcycle. Close until it is firmly secured to the handle. To remove it, lift the lock point to open it.

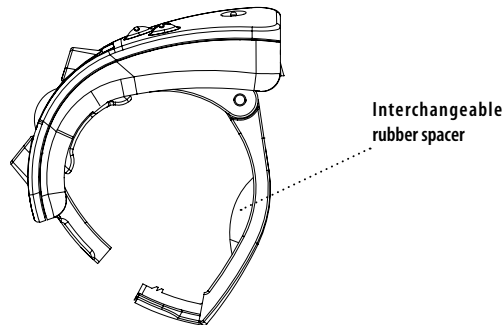

In the box you will find two additional sized rubber spacers to use if your handle bar has a different size.

Turning your Midland BT Remote on and off

Turning the unit on:

Press and hold the "Middle" button for 3 seconds until the LED indicator turns blue.

Turning the unit off:

Press and hold the "Middle" and "Back" buttons together for 3 seconds until the LED indicator flashes red 3 times.

Operative mode

The Midland BT Remote duplicates the same exact functions as the 5 buttons available on the BT intercom units, therefore you can refer to the intercom manual.

Pairing the BT Remote

The Midland BT Remote can be paired to any Midland BT intercom unit.

First time pairing

The BT Remote is ready to be paired right out of the box:

- › Turn on the BT Remote (Press and hold the "Middle" button for 3 seconds, the blue LED will start flashing)
- › Turn on the Midland intercom unit.
- › Press any button on the BT Remote (must be within 3 minutes after you turn on the Midland intercom unit).

The two devices will search for each other and will automatically pair.

Once the pairing procedure is completed, it does not need to be repeated again.

If the pairing procedure fails, repeat the procedure again. If the pairing still does not work, perform the pairing reset procedure (see the "Reset the pairing" paragraph) and then repeat the "First time pairing" procedure.

Using the BT Remote

To use the BT Remote, switch it on and press any button (make sure your Midland intercom is on) to ensure connection. As soon as the blue LED starts double flashing, you can begin using your BT Remote.

Reset the pairing

You may find it necessary to delete all paired devices stored in the BT Remote:

- › Turn off the unit.
- › Press and hold down the "Middle" and "Volume +" buttons together, until the blue LED turns on.
- › Release the buttons and the blue LED will start flashing. Now all the pairing information is deleted and it is possible to start a new pairing session (as explained in the paragraph "First time pairing"):
- › While the blue LED is flashing, turn on the Midland intercom unit.
- › Press any button on the BT Remote (must be within 3 minutes after you turn on the Midland intercom unit).

The two devices will search for each other and will automatically pair.

FCC statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

This equipment complies with Industry Canada radiation exposure limits set forth for an uncontrolled environment.



2-Way Radios



Weather Radios

Bluetooth®



Bluetooth Headsets



HD Wearable Video Cameras



Marine Radios



Emergency Crank Radios



CB Radios

Check out these and other great products at
midlandusa.com

Midland BT Product Order Form

Please send Money Order or fill in the Visa/Master Card information and mail to the address below.

Please DO NOT send cash or checks. Make Money Order to Midland Radio Corporation.

Name: _____

Address: _____

City: _____ State: _____ Zip Code: _____

Telephone: _____ E-mail: _____

Credit Card# _____ Type: _____ Exp: _____

QTY	ITEM	DESCRIPTION	PRICE	TOTAL
	BTNCT	Twin Multi Rider Intercom	\$449.99	
	BTNCS	Single Multi Rider Intercom	\$249.99	
	BTX2FMT	Twin Advanced Intercom	\$349.99	
	BTX2FMS	Single Advanced Intercom	\$199.99	
	BTX1FMT	Twin Basic Intercom	\$249.99	
	BTX1FMS	Single Basic Intercom	\$149.99	
	BTREMOTE	Handlebar Remote Control	\$99.00	
	XTA110	Mini USB Cable	\$10.00	
	XTA111	USB DC Adapter	\$19.99	
	XTA112	USB AC Adapter	\$19.99	

Mail To: Midland Radio Corporation Consumer Dept. 5900 Parretta Drive Kansas City, MO 64120 <hr/> Or Call 816.241.8500	Sub-total _____ Tax (MO, FL, WA Only) _____ S&H \$ _____ 14.95 (Applies to Domestic US only. For Hawaii, Alaska, and Puerto Rico S&H will be \$38.25 for 1 lb. and \$64.25 for 2 lb. or more).	Total \$ _____
---	--	----------------

To order online go to midlandusa.com